the site and dome seeing. Comparison between these values and those measured by the outside seeing monitor (dimm2) will give us the dome seeing. These measurements need to be done over a one-year period so that seasonal effects can eventually be detected.

Using the experience gained at other observatories, a mirror cooling system is being studied. The heat produced inside the cage will be removed with a cooling system.

(c) Image quality measurements

We measured with a direct CCD (0.19" per pixel) the FWHM of a star near the zenith. The measurements were done during the third night test. Antares was mounted during the beginning of the night to check the optical quality; it was still 0.65". We stayed near zenith to avoid the non elastic movement of the telescope mechanics and optics.

The site seeing was good all night, an average of 0.73" with 48 measurements. At the 3.6-m, the average image quality was 0.92" (48 measurements). This is by far the best result achieved during all the test nights. The best result was around 0.73", near the actual optical quality of the telescope (0.65"). The worst value was 1.05". These results are compared to the results obtained during previous test nights which are shown in Table 1.

The average value during the last night test is better than any single measurement made during the other test nights. Although the outside seeing values are not comparable for all the nights, the nights of September 2 and 3, 1995 showed outside seeing values very near to the night of February 9, 1996.

The good results of the last night run can be explained by:

- the temperature differences throughout the dome were smaller than normal,
- the optical alignment was good and was checked before the observations,
- the telescope stayed near the zenith,

TABLE 1.

| | 2 Sept. 1995 | 3 Sept. 1995 | 4 Sept. 1995 |
|------------------------|--------------|--------------|--------------|
| Average dimm2 | 0.70" | 0.66" | 1.27″ |
| Average 3.6-m | 1.21" | 1.30" | 1.46″ |
| Best value 3.6-m | 1.02" | 0.96" | 1.21" |
| Worse value 3.6-m | 1.40" | 1.70″ | 1.70″ |
| Number of measurements | 13 | 16 | 6 |
| | 4 Oct. 1995 | 5 Oct. 1995 | 30 Nov. 1995 |
| Average dimm2 | 1.13″ | 1.04" | 1.11″ |
| Average 3.6-m | 1.26" | 1.15" | 1.18" |
| Best value 3.6-m | 1.00" | 0.93" | 0.99" |
| Worse value 3.6-m | 1.51" | 1.41" | 1.36" |
| Number of measurements | 25 | 24 | 22 |
| | 1 Dec. 1995 | 2 Dec. 1995 | 9 Feb. 1996 |
| Average dimm2 | 0.90" | 1.00" | 0.73" |
| Average 3.6-m | 1.16" | 1.26″ | 0.92" |
| Best value 3.6-m | 1.01" | 1.09" | 0.73" |
| Worse value 3.6-m | 1.36" | 1.53" | 1.05" |
| Number of measurements | 30 | 48 | 48 |

- outside seeing was good.

So, can the astronomer expect similar results? Unfortunately, the answer is no. Even if a detector with the appropriate sampling would be available, the following conditions for good seeing at the 3.6-m have to be satisfied:

- good external seeing;
- observation only near zenith (because of the flexure in the telescope mechanics and movement of the optics):
- good optical alignment of the primary and secondary mirrors. (Even at the zenith, it is not certain that the primary and secondary mirrors will remain aligned from the previous night. This is due to the non-elastic movements produced in the M2 unit. The only way of verifying the alignment would be to do an image analysis with a wavefront sensor before observations start);
- the air temperature within the dome is homogeneous.

Conclusion

The results obtained during the last test period are very promising. We have

shown that images with 0.7" to 0.9" FWHM are possible during a whole night. However, we also have found what is required to get these results. To progress further at the 3.6-m we need to:

- continue the effort of eliminating the hot sources in the dome and to eventually insulate the concrete walls;
- change the M2 unit to a NTT-like M2 unit that would enable us to compensate for tube flexure when observing away from zenith. It would also eliminate the non elastic phenomena present in the actual M2 unit design;
- a Wavefront analyser can easily be installed inside the rotator, it would be very easy to activate (or semi-activate)

In fact, the recommendations I made above, which are a conclusion of the night tests, are not far from the following: "The potentially excellent optical quality of the 3.6-m can only be exploited if improvements in dome and telescope seeing are effected and a high precision of centring maintained" (Ray Wilson, ESO Technical Report No. 8, October 1977).

About the Photometric Stability of EFOSC1

S. BENETTI, ESO-La Silla

This brief report deals with the longterm photometric stability of EFOSC1. EFOSC1 is a focal reducer attached to the Cassegrain focus of the ESO 3.6-m telescope. EFOSC1 is equipped with CCD #26.

In this study, photometric standards, all from Landolt [AJ 104, 340 (1992)],

were imaged during 16 photometric nights with the B, V and $R_{\rm C}$ filters. During five of these nights, standards were also observed with the $I_{\rm C}$ filter. The date of

the observations span from September 11, 1991 to October 14, 1995. For all data, standard reduction procedures were applied (BIAS subtraction, and FF correction, with preference to sky FFs when available). When available, the extinction coefficients for the night (as found in the ESO-La Silla WWW pages) were used.


The equation $(M-m=S_m\times(B-V)+K_m)$ was then fitted for each filter $(m=B,V,R_C,I_C)$ and for each night. Averaged over all the nights the corresponding equations for EFOSC1 are the following:

 $\begin{array}{l} B-b=+0.190\pm0.013\times(B-V)+24.06\pm0.09~(^*)\\ V-v=+0.050\pm0.011\times(B-V)+24.75\pm0.08\\ R_C-r=+0.011\pm0.012\times(B-V)+24.80\pm0.07\\ I_C-i=-0.035\pm0.002\times(B-V)+23.62\pm0.05 \end{array}$

The instrumental magnitudes were calculated with the counts expressed in ADUs (the conversion factor for CCD #26 is 4e⁻/ADU).

The inverted A in the Figure shows the re-aluminisation date of the 3.6-m primary mirror (during October 18, 1994;

EFOSC1 Color Term Constants

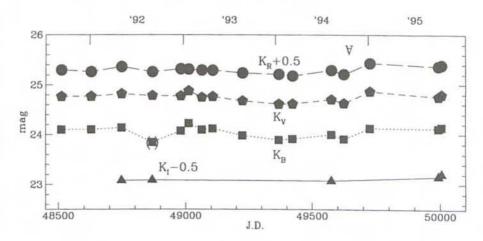


the previous one was done during August, 1990). A significant increase in the efficiency is measured (especially in the V and $R_{\rm C}$ bands, see figure). If we compute the zero points for the observations before this date only, we get:

$$\begin{split} &K_B = 24.05 \pm 0.09 \\ &K_V = 24.73 \pm 0.08 \\ &K_R = 24.77 \pm 0.05 \\ &K_I = 23.58 \pm 0.01 \end{split}$$

The zero points for the first point after the re-aluminisation (January 7, 1995) are 0.08 mag higher in B, 0.14 mag higher in V, and 0.16 mag higher in B₀.

higher in V, and 0.16 mag higher in R_C. From an inspection of the figure, it is clear that there is an overall fair photometric stability for EFOSC1 and that the fluctuations in the zero points are smaller than 0.1 mag for all filters. Furthermore, no obvious systematic trends are seen before October 1994.

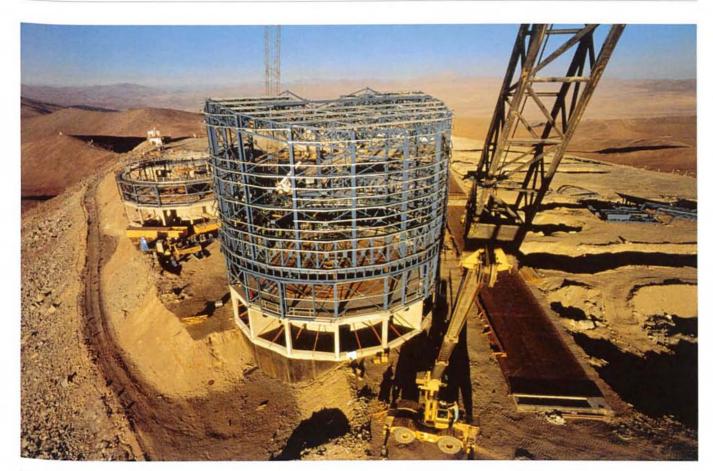

Unusual View of VLT Site

Hanging from a crane, ESO photographer H.H. Heyer took this view over the VLT platform in the late-evening sunlight at the end of February 1996. Apart from the VLT Unit 1, with almost fully assembled steel structure, Unit 2 is behind at left and the interferometric tunnel stretches across at right.

^(*) calculated without one anomalous point. This point is circled by parentheses in the Figure that shows the trend in the zero points, $K_{\rm m}$, with time (Julian days).